


SSP502-40V0 Compression-Deflection Data **Flame Retardant Shielding Silicone Elastomer**

SSP502-40V0 is 40 durometer nickel coated graphite filled flame retardant conductive silicone elastomer that conforms to UL-94 V0. Compression deflection is a measurement of the force required to compress a material a set amount.

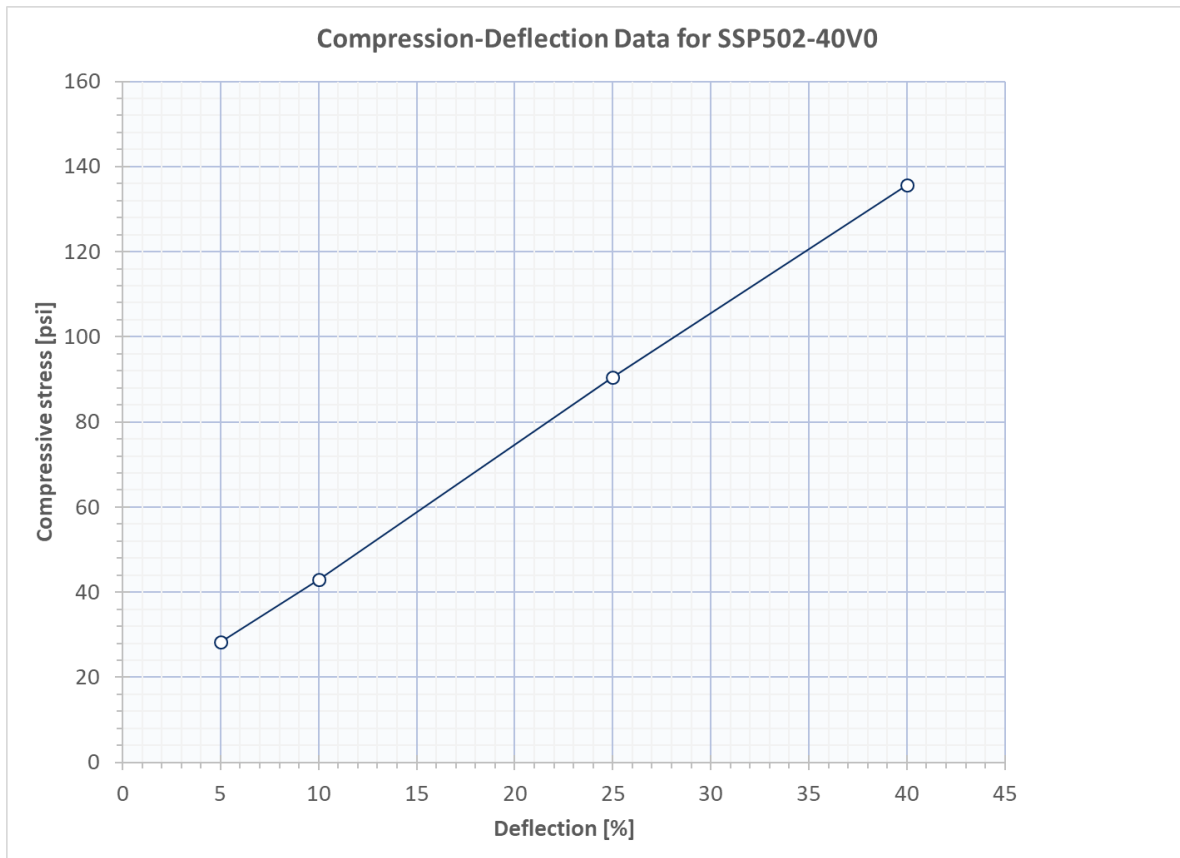

Notes

Testing performed according to ASTM D575 Method A.
Values are representative and do not constitute a specification.

For more information visit www.sspinc.com. To order call (518) 885-8826 or Fax (518) 885-4682.

Specialty Silicone Products, Inc.

Corporate Technology Park * 3 McCrea Hill Road * Ballston Spa, NY 12020

Specialty Silicone Products, Inc is an ISO 9001:2015 registered company.

Because we cannot foresee or control varied conditions under which this information and our materials may be used, we do not guarantee the applicability or accuracy of this information or the suitability of our materials for their specific purposes. This material is provided without warranty, either expressed or implied, of fitness for a specific purpose or nothing herein shall be construed as a recommendation for uses which infringe valid patents or as extending a license under valid patents.